


Installation and User Manual

MODEL: Bidet seat

Thank you for purchasing our bidet, please read through the manual carefully for appropriate use of the product.

After you read through the manual, keep it in a convenient place for future reference.

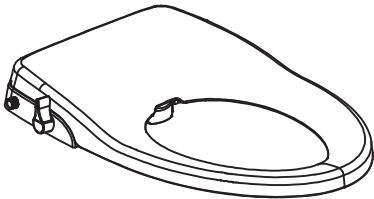

1	Names of Parts	1/2
----------	-----------------------------	------------

2	Installation	3
	• Precautions	3
	• Installation	3
	Pre-installation	3
	Installation procedure	4
	Connecting water hose	5

3	Operation	6
	Stop	6
	Bidet	6
	Wash	6


4	Cleaning and dismantling	7
----------	---------------------------------------	----------

5	Self diagnosis and specifications	8
	Self diagnosis and trouble shooting	8
	Specifications	8
	Warranty	9/10

BIDET SEAT

1 Names of Parts


Product

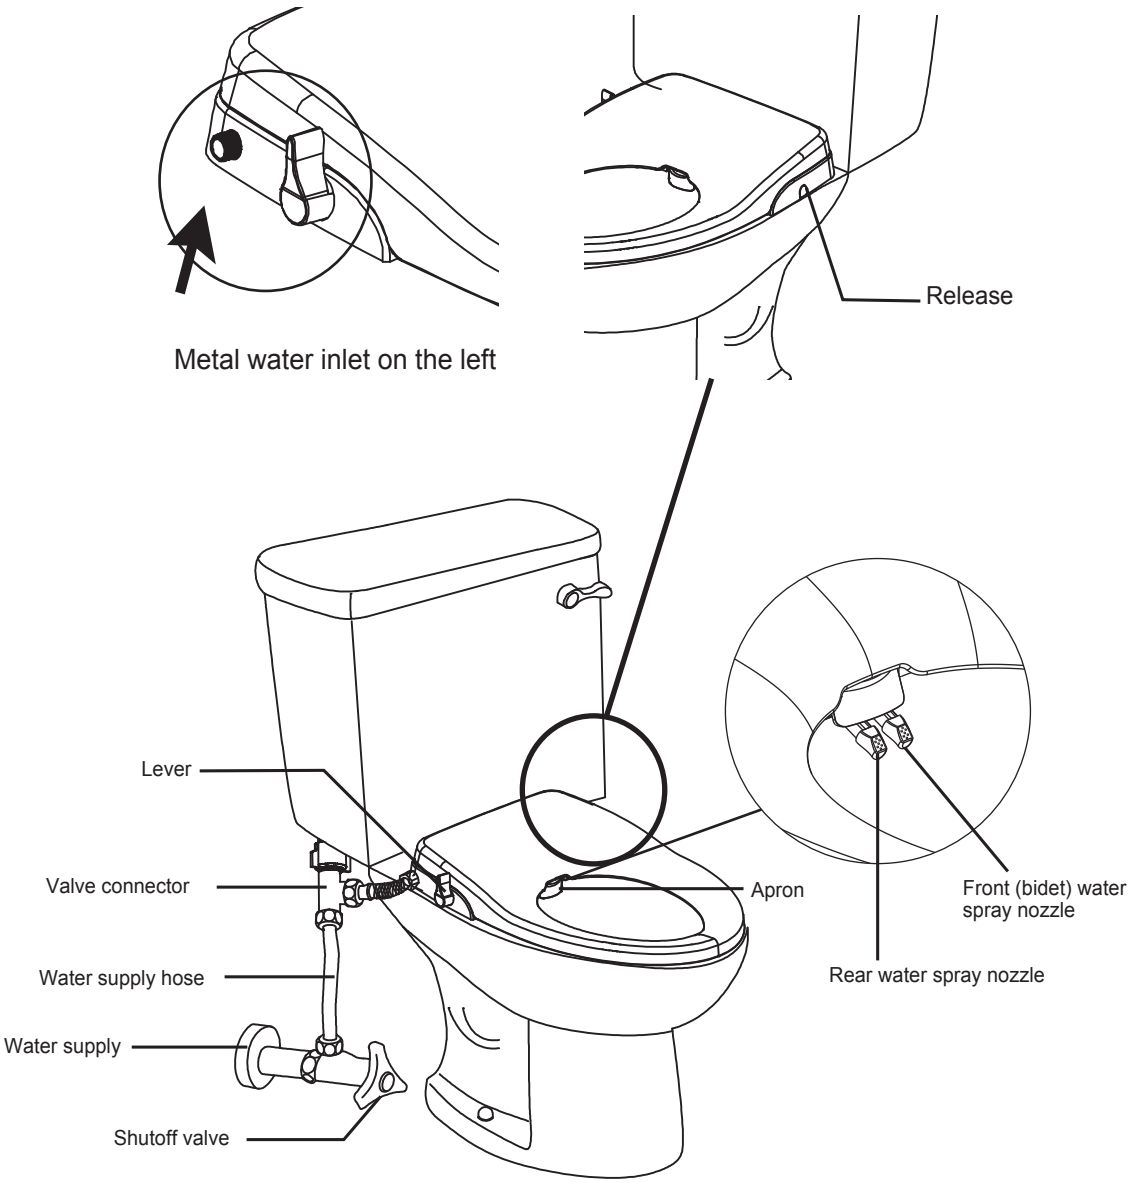


BIDET SEAT

■ Components

1. Main body

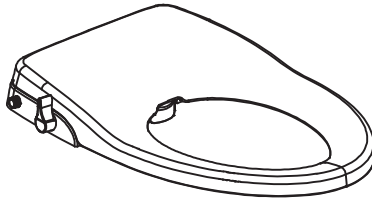

2. Installation components



Mounting bolts (2)



Expansion nuts (2)




Mounting bolts (2)



Butterfly Nut (2)




Mounting brackets (2)



Catch plate




Mounting brackets (2)



Catch plate

3. T-shaped connector and washer




T-shaped connector




Net washer*2

4. Water hose



5. Installation and user manual



Note:

There are two methods for installation. The way of using the expansive nuts is recommended. Another way is using the butterfly nuts. Please select the best option for your specific installation needs.

BIDET SEAT

2 Installation

Please make sure you read the instructions carefully and install it properly.


■ Caution

1. The water pressure limit is from 10 to 110 PSI. Please use as instructed.
2. The water shutoff valve should be near where the product is installed.


■ Product Installation Procedure

■ Pre-installation


1. Insert the mounting bolts into the rectangular steel mounting brackets.



2. Insert the mounting bolts with the brackets into the catch plate.



3. Example of how the bolts fit through the mounting brackets and how they are placed onto the catch plate and secured to the toilet.

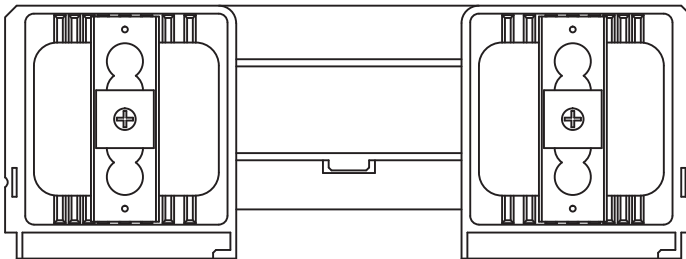

BIDET SEAT

■ Installation Procedure

● First installation method (recommended)

1. Completely remove the old toilet seat & lid



2. Install expansion nuts. Be sure to firmly press down so the top of the expansion nut is flush with the ceramic toilet surface.




3. Attach the catch plate

- Attach the catch plate in the toilet seat holes. Adjust the position of mounting bolts and adjusting pieces to line up the mounting bolts to the expansion nuts. Then tighten to secure the catch plate.



4. Install the bidet seat

- Line up the bidet with the catch plate. You will hear the bidet seat click into place. Push the bidet onto the catch plate.

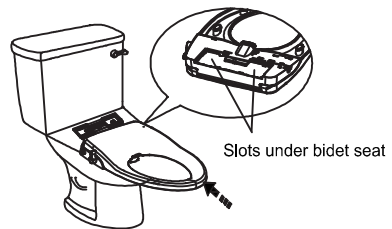


● Second installation method

1. Remove the old toilet seat. Put the installation catch plate on the ceramic toilet bowl. Refer to first installation method step 1.
2. Put the catch plate over the toilet seat mounting holes in the ceramic of the connecting bolts with adjusting pieces. Screw on the nuts from underneath the toilet. Then tighten to secure the adapter plate. Refer to the first installation method step 3.
3. Refer to first installation method step complete the following installation procedure.


BIDET SEAT

■ Connecting water hose


1. Close the water supply valve.




2. Unscrew water supply hose from water tank. Place towel below tank to catch any dripping water.

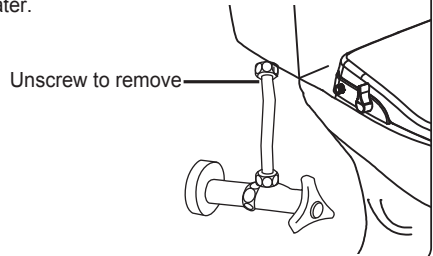


3. Using finger nut remember to add net washer into the nut, attach T-connector to water tank where you removed the water supply hose.

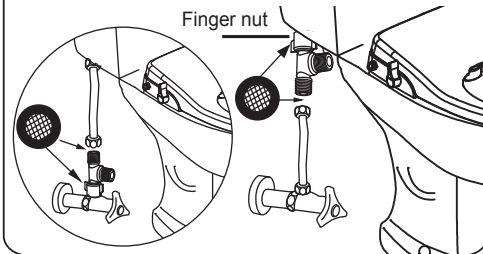


4. Attach water supply hose to bottom of T-connector.



5. Connect the water hose to the bidet seat and the other end to the T-connector and tighten snugly. Do not over tighten.

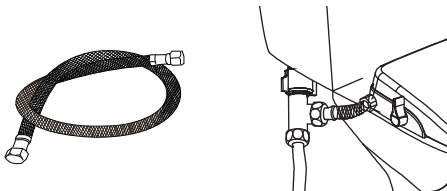

6. Slowly open the water valve to check if there is any water leakage.




7. Wipe the hoses and connectors thoroughly with a towel and carefully observe for any leaks for at least 10 minutes. Tighten any connectors gently until leakage stops. If any leaks continue, turn off water supply and check older hoses for damaged rubber o-rings and replace if necessary.

BIDET SEAT

3 Operation


■ STOP

- Return the lever to the upright position to turn it off.

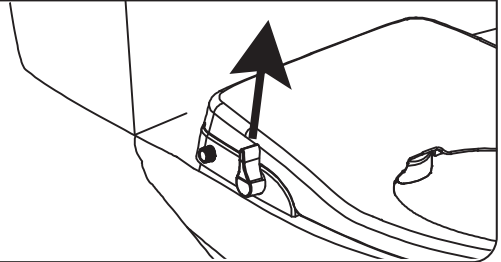


🚿 BIDET (FRONT WASH)

- Gradually push control lever forward until preferred pressure is reached.

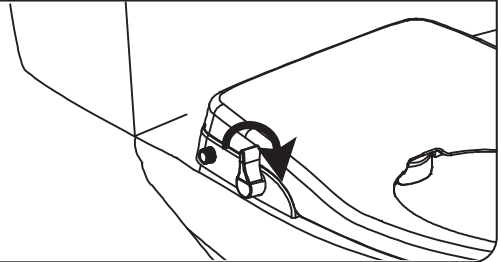

🚿 REAR WASH

- Gradually push control lever back until preferred pressure is reached.

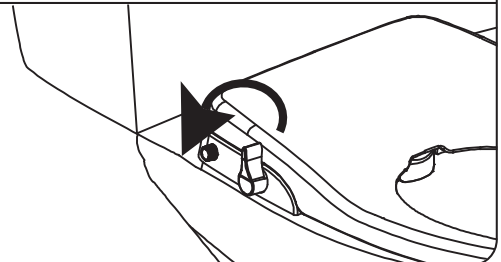

BIDET SEAT

4 Cleaning and maintenance


1. Cleaning the exterior of the bidet seat

Use a smooth sponge/cloth with water to clean the product. Do not use the following types of cleaning products: hydrogen chloride detergent, paint thinner, benzene, abrasive paper, polishing agent, bleach, or chlorine.



2. Cleaning the spray nozzles

Pull out the nozzle softly and use a smooth cloth/sponge or soft toothbrush to clean the nozzle



3. Remove the main body

Push the release button and pull the bidet seat forward as shown.



BIDET SEAT

6 Self Diagnosis and Specifications

Self Diagnosis and Troubleshooting

Status	Cause	Solution
Water is too low during WASH/BIDET	1. Low water pressure of the unit	During use, turn the lever forward or backward to highest setting
	2. Low water pressure of water supply	If the water supply pressure is too low, contact your local water utility.
No water comes out during WASH/BIDET	1. Water shut-off valve is turned off	Turn on the water shut-off valve
	2. Nozzle head is stuck	Take off and clean the nozzle head
	3. External water pressure is low	Increase external water pressure
Water dropping from bowl when using the unit	External water pressure is too high	The maximum water pressure of the unit is 85 PSI. If the water supply pressure is above this, contact your local water utility.



Do not disassemble, repair, or remodel the unit.
as this will void warranty

Specifications

Classification	Description
Model No.	Bidet seat
WASH water flow	0.5-3.5L/min
Feminine water flow	0.5-3.5L/min
Backflow Prevention	Check valve
Water Supply	Direct from water pipes
Water Pressure Range	14-85 PSI
Dimensions	369×500×68mm
Weight	1.95kg

Warranty

Our Bidet is warranted against defects in materials or workmanship for one (1) year from the date of original purchase. Defective parts or a defective product returned to our company will be repaired with new or comparable rebuilt parts by our company at their sole discretion.

This limited warranty given by our company covers all defects encountered in normal use of our bidet, and does not apply in the following cases:

1. Loss of or damage to our bidet due to abuse, misuse, tampering, mishandling, improper packaging by you, alteration, and failure to follow operating instructions.
2. Use of parts or supplies (other than those by our company dealers) that cause damage to our bidet.
3. Replacement of discolored or stained parts caused by chlorine, bleach, ammonia and other chemicals, cleaning supplies, oxidation, normal wear and tear.
4. Damage to or malfunction of the unit as a result of improper and negligent installation.

BIDET SEAT

5. Any and all damages to plumbing, walls, floors, ceiling and personal properties resulting from water leaks or breakage. The product must be used at the user's own risk. Therefore, the owner hereby releases the manufacturer and distributor from any and all claims for damages where the above condition exists.

No implied warranty, including any implied warranty of merchantability or fitness or a particular purpose, applies to our company bidet after the applicable period of the express limited warranty stated above, and no other express warranty or guarantee, except as mentioned above, given by any person or entity with respect to our bidet shall bind our bidet, (some states and provinces do not allow limitations on the length an implied warranty) so the above limitation may not apply to you our bidet shall not be liable for revenues or spacings, inconvenience, expense for substitute equipment or service, or any other special, incidental or consequential damages caused by the use or misuse of or inability to use, our bidet, regard less of the possibility and foresee ability of such damages. In no event shall recovery of any kind against our bidet be greater in amount than the purchase price of the product and causing the alleged damage. Without limiting the foregoing, you assume all risk and liability for loss, damage or injury to you and your property and to others and their property arising out of use or misuse of or inability to use the our bidet not caused directly by the negligence of our bidet. This limited warranty shall not extend to anyone other than the original purchaser of our bidet.

BIDET SEAT

Thank You

CONTACT INFORMATION

JAPAN STYLE INC

Email: info@shushujp.com

Contact No.: +81 90 1863 8754

Address: 2-5-319, Hoo-cho, Chikusa-ku,

Nagoya 464-0057 Japan

Website: www.shushujp.com